

TargetTag



General characteristics

- ❖ Objects materials: metal surfaces
- ❖ Dimensions: 70 x 18 x 1.4 mm
- ❖ Standard: ISO 18000-63 / EPC global Gen2v2
- ❖ Operating frequency: 865 – 870 MHz
- ❖ Operating temperature: - 40°C to +85°C
- ❖ Readrange: up to 6 m

Electrical specifications


- ❖ IC: Impinj Monza 6
- ❖ Memory:
 - ❖ EPC: 128/96 bits
 - ❖ Unique TID: 96 bits
 - ❖ Access Password: 32 bits
 - ❖ Kill Password: 32 bits
 - ❖ User memory: 32/64 bits

The structure of the tag

0.075	lamination
0.063	Inlay (upper part)
1.1	dielectric interlayer
0.06	Inlay (bottom part)
0.07	adhesive layer
0.11	carrier substrate

The thickness in mm is used.

Delivery format

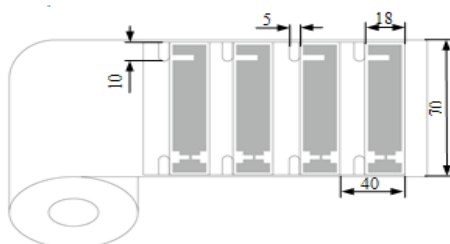

- ❖ Delivery format on the basis of self-adhesive
- ❖ Number of labels per roll: 300 pcs
- ❖ Inner roll diameter: 76 mm
- ❖ Outer roll diameter: not more than 190 mm
- ❖ MOQ: 1 roll