


TwinTag-mini




General characteristics

- ❖ Objects materials: paper, cardboard
- ❖ Dimensions: 36 x 16 mm
- ❖ Pitch: 20 mm
- ❖ Standard: ISO 18000-63 / EPC global Gen2v2
- ❖ Operating frequency: 865 – 870 MHz
- ❖ Operating temperature: - 40°C to +85°C
- ❖ Operating humidity: no more than 60 %
- ❖ Readrange: up to 5 m (for 3.2 W EIRP)

Electrical specifications


Memory	IC		
	Impinj Monza R6-P	NXP UCODE G2iM	Alien Technology Higgs 3
EPC	128 bits	256 bits	96 ÷ 480 bits
Unique TID	96 bits	96 bits	96 bits
Access Password	32 bits	32 bits	32 bits
Kill Password	32 bits	32 bits	32 bits
User memory	32 bits	512 bits	512 ÷ 128 bits

The structure of the tag

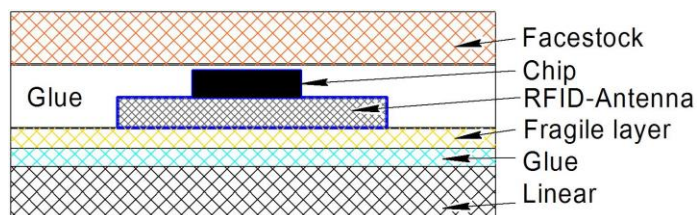

- ❖ Top material: PP CLEAR 30 µm

Delivery format

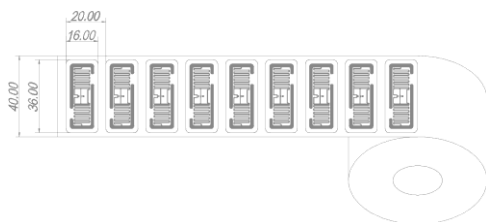

- ❖ Delivery format on the basis of self-adhesive. Width of roll is 40 mm.
- ❖ Number of labels per roll: 7 000 pcs
- ❖ Inner roll diameter: 76 mm
- ❖ Outer roll diameter: not more than 200 mm
- ❖ MOQ: 1 roll