


## WinnyTag

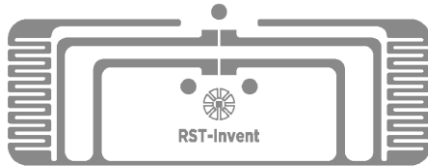


### General characteristics

- ❖ Objects materials: glass
- ❖ Dimensions: 26 x 12 ± 0,5 mm
- ❖ Antenna dimensions: 21.86 x 7.5 mm
- ❖ Pitch: 20 mm
- ❖ Standard: ISO 18000-63 / EPC global Gen2v2
- ❖ Operating frequency: 865 – 870 MHz
- ❖ Operating temperature: - 40°C to +85°C
- ❖ Operating humidity: no more than 80 %
- ❖ Readrange: up to 1.5 m for glass

### Electrical specifications


Memory	IC				
	NXP UCODE 7	NXP UCODE 7m	NXP UCODE 8	NXP UCODE 8m	Impinj Monza R6-P
EPC	128 bits	128 bits	128 bits	96 bits	128/96 bits
Unique TID	96 bits	96 bits	96 bits	96 bits	96 bits
Access Password	32 bits	32 bits	32 bits	32 bits	32 bits
Kill Password	32 bits	32 bits	32 bits	32 bits	32 bits
User memory	-	32 bits	-	32 bits	32/64 bits

### The structure of the tag

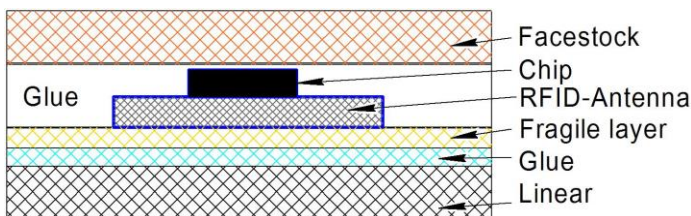

- ❖ Top material: PEFC RAFLACOAT PLUS

### Delivery format

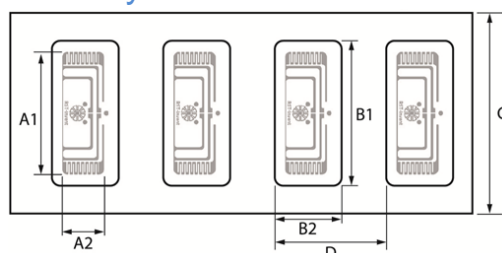

- ❖ Delivery format on the basis of self-adhesive
- ❖ Number of labels per roll: pcs
- ❖ Inner roll diameter: 76 mm
- ❖ Outer roll diameter: not more than 200 mm
- ❖ MOQ: 1 roll



RST-Invent LLC, PSRN: 1107847227949  
195220, Russia, Saint Petersburg,  
Nepokorenykh pr., 49, office 701  
Phone: +7 812 318 17 17, fax: +7 812 318 11 28  
E-mail: info@rst-invent.ru, www.rst-invent.com

---

- ❖ Geometry sizes: A1=21.86 mm, A2=7.5 mm,  
B1=26 mm, B2=12 mm, C=36 mm, D=20mm