

PuzzleTag 40




General characteristics

- ❖ Dimensions: Ø38 mm
- ❖ Pitch: 55 mm
- ❖ Standard: ISO/IEC 14443A
- ❖ Operating frequency: 13.56 MHz
- ❖ Operating temperature: - 25°C to +70°C
- ❖ Operating humidity: no more than 80 %

Electrical specifications


- ❖ IC: NXP NTAG216
- ❖ Memory:
 - ❖ Unique UID: 7 bits
 - ❖ User memory: 888 bits
 - ❖ Access Password: 32 bits

The structure of the tag

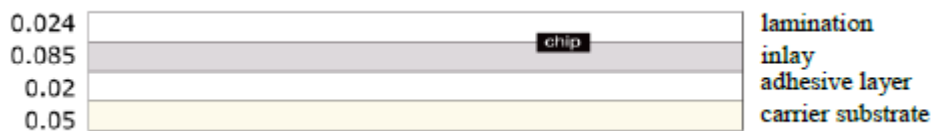

The thickness in mm is used.

Delivery format

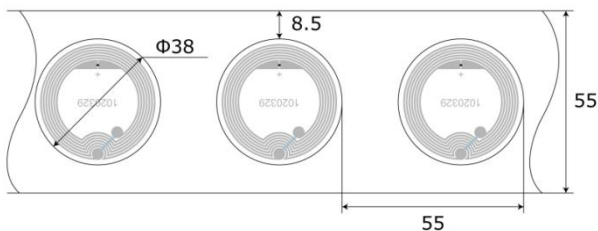

- ❖ Delivery format on the basis of self-adhesive
- ❖ Number of labels per roll: 2 000 pcs
- ❖ Inner roll diameter: 76 mm
- ❖ Outer roll diameter: not more than 190 mm
- ❖ MOQ: 1 roll, 10 rolls