

RFID Tag WindshieldTag




General characteristics

- ❖ Marking object: windshield
- ❖ Dimensions: 99 x 9 mm ± 0.5 mm
- ❖ Antenna dimensions: 91 x 5 mm
- ❖ Pitch: 20 mm
- ❖ Standard: ISO 18000-63 / EPC global Gen2v2
- ❖ Frequency range: 865 – 870 MHz
- ❖ Operating temperature: - 40°C to +80°C
- ❖ Operating humidity: up to 80 %
- ❖ Read range: 12 m

Electrical specifications


- ❖ IC: NXP UCODE DNA
- ❖ Memory:
 - ❖ EPC: 224 bit
 - ❖ Unique TID: 96 bit
 - ❖ Access Password: 32 bit
 - ❖ Kill Password: 32 bit
 - ❖ User memory: 3072 bit

Structure

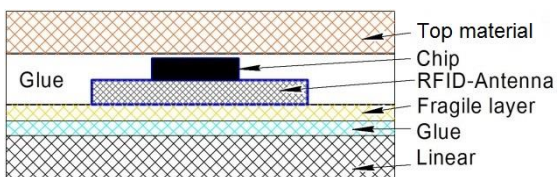

- ❖ Top material:
 paper PEFC RAFLACOAT PLUS or
 transparent polypropylene film PP CLEAR TC
 30

Delivery format

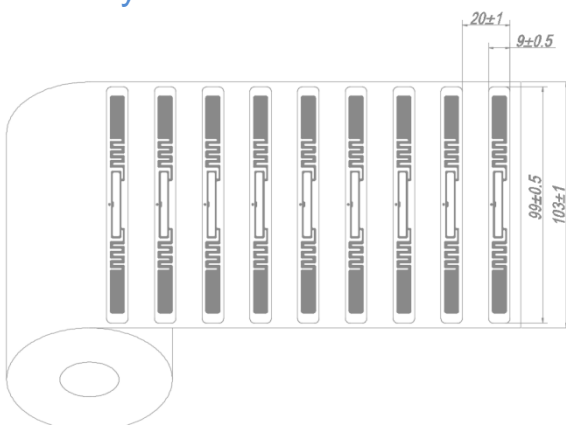

- ❖ Delivery format: self-adhesive label
- ❖ Quantity per roll: 7 000 pcs
- ❖ Inner roll diameter: 76 mm
- ❖ Outer roll diameter: ≤ 200 mm
- ❖ MOQ: 1 roll